

Advances in Intelligent and Soft Computing

60

Editor-in-Chief: J. Kacprzyk

Advances in Intelligent and Soft Computing

Editor-in-Chief

Prof. Janusz Kacprzyk
Systems Research Institute
Polish Academy of Sciences
ul. Newelska 6
01-447 Warsaw
Poland
E-mail: kacprzyk@ibspan.waw.pl

Further volumes of this series can be found on our homepage: springer.com

- Vol. 46. V.-N. Huynh, Y. Nakamori,
H. Ono, J. Lawry,
V. Kreinovich, H.T. Nguyen (Eds.)
*Interval / Probabilistic Uncertainty and
Non-classical Logics*, 2008
ISBN 978-3-540-77663-5
- Vol. 47. E. Pietka, J. Kawa (Eds.)
Information Technologies in Biomedicine, 2008
ISBN 978-3-540-68167-0
- Vol. 48. D. Dubois, M. Asunción Lubiano,
H. Prade, M. Ángeles Gil,
P. Grzegorzewski,
O. Hryniwicz (Eds.)
*Soft Methods for Handling
Variability and Imprecision*, 2008
ISBN 978-3-540-85026-7
- Vol. 49. J.M. Corchado, F. de Paz,
M.P. Rocha,
F. Fernández Riverola (Eds.)
*2nd International Workshop on Practical
Applications of Computational Biology
and Bioinformatics (IWPACBB 2008)*, 2009
ISBN 978-3-540-85860-7
- Vol. 50. J.M. Corchado, S. Rodriguez,
J. Llinas, J.M. Molina (Eds.)
*International Symposium on Distributed
Computing and Artificial Intelligence 2008
(DCAI 2008)*, 2009
ISBN 978-3-540-85862-1
- Vol. 51. J.M. Corchado, D.I. Tapia,
J. Bravo (Eds.)
*3rd Symposium of Ubiquitous
Computing and Ambient
Intelligence 2008*, 2009
ISBN 978-3-540-85866-9
- Vol. 52. E. Avineri, M. Köppen,
K. Dahal,
Y. Sunitiyoso, R. Roy (Eds.)
Applications of Soft Computing, 2009
ISBN 978-3-540-88078-3
- Vol. 53. E. Corchado, R. Zunino,
P. Gastaldo, Á. Herrero (Eds.)
*Proceedings of the International
Workshop on Computational
Intelligence in Security for
Information Systems CISIS 2008*, 2009
ISBN 978-3-540-88180-3
- Vol. 54. B.-y. Cao, C.-y. Zhang,
T.-f. Li (Eds.)
Fuzzy Information and Engineering, 2009
ISBN 978-3-540-88913-7
- Vol. 55. Y. Demazeau, J. Pavón,
J.M. Corchado, J. Bajo (Eds.)
*7th International Conference on Practical
Applications of Agents and Multi-Agent
Systems (PAAMS 2009)*, 2009
ISBN 978-3-642-00486-5
- Vol. 56. H. Wang, Y. Shen,
T. Huang, Z. Zeng (Eds.)
*The Sixth International Symposium on Neural
Networks (ISNN 2009)*, 2009
ISBN 978-3-642-01215-0
- Vol. 57. M. Kurzynski,
M. Wozniak (Eds.)
Computer Recognition Systems 3, 2009
ISBN 978-3-540-93904-7
- Vol. 58. J. Mehnen, A. Tiwari,
M. Köppen, A. Saad (Eds.)
Applications of Soft Computing, 2009
ISBN 978-3-540-89618-0
- Vol. 59. K.A. Cyran,
S. Kozielski, J.F. Peters,
U. Stańczyk, A. Wakulicz-Deja (Eds.)
Man-Machine Interactions, 2009
ISBN 978-3-642-00562-6
- Vol. 60. Z.S. Hippe,
J.L. Kulikowski (Eds.)
Human-Computer Systems Interaction, 2009
ISBN 978-3-642-03201-1

Zdzisław S. Hippe,
Juliusz L. Kulikowski (Eds.)

Human-Computer Systems Interaction

Backgrounds and Applications



Springer

Editors

Prof.-Dr. habil. Zdzisław S. Hippe
Chair of Expert Systems and
Artificial Intelligence
WSIiZ - University of Technology and Management
ul. Sucharskiego 2
35-225 Rzeszów
Poland
E-mail: zhippe@wsiz.rzeszow.pl

Prof.-Dr. habil. Juliusz L. Kulikowski
Institute of Biocybernetics and
Biomedical Engineering
Polish Academy of Sciences
ul. Troydena 4
02-109 Warsaw
Poland
E-mail: juliusz.kulikowski@ibib.waw.pl

ISBN 978-3-642-03201-1

e-ISBN 978-3-642-03202-8

DOI 10.1007/978-3-642-03202-8

Advances in Intelligent and Soft Computing

ISSN 1867-5662

Library of Congress Control Number: Applied for

©2009 Springer-Verlag Berlin Heidelberg

This work is subject to copyright. All rights are reserved, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilm or in any other way, and storage in data banks. Duplication of this publication or parts thereof is permitted only under the provisions of the German Copyright Law of September 9, 1965, in its current version, and permission for use must always be obtained from Springer. Violations are liable for prosecution under the German Copyright Law.

The use of general descriptive names, registered names, trademarks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

Typeset & Cover Design: Scientific Publishing Services Pvt. Ltd., Chennai, India.

Printed in acid-free paper

5 4 3 2 1 0

springer.com

Foreword

Recent increases in computational processing power and expanding computational context suggest shifting paradigms in the role of computing. Computers have become mobile and embedded in our lives. They serve as media and as information channels. They have become loci of experience as well as work horses. They have become ambient and proactive as well as deskbound and reactive. They have become immersive and intrusive. We can wear them as well as sit in front of them. They can even sense.

So far our *cohabitation* with computers has been guided by the Human-Computer Systems Interaction discipline. However, there is a need for refocusing this field from a traditional discipline delivering truth into a discipline delivering value – collection of more subjectively oriented usability centered design heuristics, valued by a system stakeholders. Thus, the term Human-Computer System Interaction has been coined to grasp these *postmodern* facets of the cohabitation in question

The University of Information Technology and Management (UITM) in Rzeszów, Poland, supports research devoted the above mentioned domain within the own, extended research program. Results gathered so far has entitled us to organize (with a technical co-sponsorship of IEEE) the International Human System Interaction Conference (held on May 25-28.2008 in Kraków, Poland), becoming now a cyclic international event. 44 out of 180 papers presented during this conference have been selected for this volume entitled **Human-Computer Systems Interaction: Backgrounds and Applications**.

But it is necessary to emphasize that this book is not a collection of post conference papers. All articles include new, so far unpublished research results, and even more they have been re-edited and distinctly extended by respective authors, to fulfill expectations of the envisioned readers. For this reason the book reflects on advances in human – computer system interaction, as well as complementary research efforts in related areas. It is impossible to summarise all the papers in brief but I hope readers will find them as a truly helpful guide and a valuable source of information about the state-of-the-art status of this extremely important domain of the computer science.

To sum it up, I wish to thank all the authors for their insights and excellent contributions to this book. I would also like to express my special thanks to the UITM faculty members for their excellent job in preparing this volume. I hope it will support the position of UITM in research and in education.

Tadeusz Pomianek
UITM President

Preface

For the last decades, as the computer technology has been developing, the importance of human-computer systems interaction problems was growing. This is not only because the computer systems performance characteristics have been improved but also due to the growing number of computer users and of their expectations about general computer systems capabilities as universal tools for human work and life facilitation. The early technological problems of man-computer information exchange – which led to a progress in computer programming languages and input/output devices construction – have been step by step dominated by the more general ones of human interaction with-and-through computer systems, shortly denoted as H-CSI problems. The interest of scientists and of any sort specialists to the H-CSI problems is very high as it follows from an increasing number of scientific conferences and publications devoted to these topics. The present book contains selected papers concerning various aspects of H-CSI. They have been grouped into five Parts:

- I. General H-CSI problems (7 papers),
- II. Disabled persons helping and medical H-CSI applications (9 papers),
- III. Psychological and linguistic H-CSI aspects (9 papers),
- IV. Robots and training systems (8 papers),
- V. Various H-CSI applications (11 papers).

The papers included into **Part I** illustrate a variety of basic approaches met in H-CSI problems solving. To begin with cognitive methods used in decision making in ill-structured situations, through bionic models of information processing, ontological models of knowledge acquisition and representation, formal models of dialogue between man and computer system, consistency-based approach to the prediction of states of a system, up to annotation of images based on their semantic aspects. Of course, the above-mentioned papers are no more but several samples of possible approaches to H-CSI problems solution. However, they indicate the role of models and concepts concerning human thinking mechanisms in development of the advanced H-CSI tools.

Problems of helping disabled persons by substitution of their malfunctioning sense organs by suitable artificial tools, is one of the greatest social and economical importance. Since medical techniques of natural sense organs implanting are not suf-

ficiently effective, the role of auxiliary technical devices will be unquestionable. This area of investigations is represented in **Part II** by papers concerning the visually disabled persons mobility helping by teleassistance navigation systems, eye-driven computer mouse and eye-blink controlled human-computer interface. Computer-aided recognition of gestures also belongs to this group of presented works. Computer-assisted medical diagnostic systems are represented by papers devoted to image analysis applications in oncology, cardiology and radiology.

Part III can also be divided into two subgroups of papers. In the first one the problems of automatic emotions recognition are dominating. Such systems can also help visually disabled persons in acquiring additional information from the face observations of their interlocutors. A paper concerning the concept of a day-dreaming machine shows that no limits for the attempts to fill the gaps between human and machine thinking can be *a priori* marked despite the fact that they are based on different backgrounds.

The second subgroup of papers in this Part concerns linguistic aspects of H-CSI systems design. One paper is also focused on the problem of virtual reality-based visualization framework perception and capture of information.

Problems of the design of robots, including their sensor subsystems, virtual reality modeling, biologically reasoned point-of-interest image compression, as well as kinetic analysis and training of surgical robots are considered in **Part IV**. A dominating idea consists here in functional capabilities of robots' extension on one hand, and human supervisory control of utilization of robots on the other one.

Miscellaneous H-CSI applications in enterprises management, technical diagnosis, molecular modeling, virtual museums organization, etc., are presented by the papers in **Part V**. They show that the H-CSI area of investigations and practical applications touches practically all possible domains of human activity.

To summarize, the book contains a collection of 44 papers written by an international team of contributors representing academia and research institutions from sixteen countries: Austria, China (also Hong Kong), Croatia, France, India, Iran, Israel, Italy, Japan, Poland, Romania, Russian Federation, South Korea, Spain, Taiwan, and the United States. We want to thank them warmly for supplying truly interesting and innovative papers.

Our special thanks go to Prof. Janusz Kacprzyk the editor of the Series for his invaluable support and help.

We are also indebted to DSc Teresa Mroczek, Ph.D. from the University of Information Technology and Management in Rzeszów (Poland) for her assistance in preparation of index, camera-ready copy of the book and conducting most of the correspondence with the authors.

Finally, we would like to express our sincere thanks to the publishing team at Springer-Verlag, in particular to Dr. Thomas Ditzinger for his permanent, versatile and very friendly help.

Zdzisław S. Hippe
Juliusz L. Kulikowski
Editors

Contents

Part I: General Problems of H-CSI

From Research on the Decision-Making in Ill-Structured Situation Control and the Problem of Risks	3
<i>N.A. Abramova, S.V. Kovriga</i>	
Emulating the Perceptual System of the Brain for the Purpose of Sensor Fusion	17
<i>R. Velik, D. Bruckner, R. Lang, T. Deutsch</i>	
Knowledge Acquisition in Conceptual Ontological Artificial Intelligence System	29
<i>M. Krótkiewicz, K. Wojtkiewicz</i>	
Problems of Knowledge Representation in Computer-Assisted Decision Making Systems	39
<i>J.L. Kulikowski</i>	
A Dialogue-Based Interaction System for Human-Computer Interfaces	55
<i>G. Bel-Enguix, A.H. Dediu, M.D. Jiménez-López</i>	
Consistency-Based vs. Similarity-Based Prediction Using Extensions of Information Systems – An Experimental Study	67
<i>K. Pancerz</i>	
Image Annotation Based on Semantic Rules	83
<i>A.L. Ion</i>	

Part II: Disabled Persons Helping and Medical H-CSI Applications

A Prototype Mobility and Navigation Tele-Assistance System for Visually Disabled	97
<i>M. Bujacz, P. Barański, M. Morański, P. Strumillo, A. Materka</i>	
Eye-Mouse for Disabled	109
<i>T. Kocejko, A. Bujnowski, J. Wtorek</i>	
Eye-Blink Controlled Human-Computer Interface for the Disabled	123
<i>A. Królak, P. Strumillo</i>	
HMM-Based System for Recognizing Gestures in Image Sequences and Its Application in Continuous Gesture Recognition.....	135
<i>A. Wilkowski</i>	
Machine Learning of Melanocytic Skin Lesion Images.....	147
<i>G. Surówka</i>	
A Preliminary Attempt to Validation of Glasgow Outcome Scale for Describing Severe Brain Damages	161
<i>J.W. Grzymała-Busse, Z.S. Hippe, T. Mroczek, W. Paja, A. Bucinski</i>	
Segmentation of Anatomical Structure by Using a Local Classifier Derived from Neighborhood Information	171
<i>S. Takemoto, H. Yokota, T. Mishima, R. Himeno</i>	
An Application of Detection Function for the Eye Blinking Detection	181
<i>T. Pander, T. Przybyla, R. Czabański</i>	
Self-directed Training in an Evidence-Based Medicine Experiment	193
<i>M.M. Marta, S.D. Bolboacă, L. Jäntschi</i>	

Part III: Psychological and Linguistic Aspects of H-CSI

Emotion Recognition from Facial Expression Using Neural Networks	207
<i>G.U. Kharat, S.V. Dudul</i>	

Emotion Eliciting and Decision Making by Psychodynamic Appraisal Mechanism	221
<i>J. Liu, H. Ando</i>	
Positing a Growth-Centric Approach in Empathic Ambient Human-System Interaction	233
<i>R. Legaspi, K. Fukui, K. Moriyama, S. Kurihara, M. Numao</i>	
Toward Daydreaming Machines	245
<i>S.I. Ahson, A. Buller</i>	
Eliminate People's Expressive Preference in the Mood of Fuzzy Linguistics	257
<i>Z. Qin, Q.C. Shang</i>	
VoiceXML Platform for Minority Languages	269
<i>M. Brkić, M. Matetić, B. Kovačić</i>	
Polish Speech Processing Expert System Incorporated into the EDA Tool	281
<i>A. Putka, P. Kłosowski</i>	
A Web-Oriented Java3D Talking Head	295
<i>O. Gambino, A. Augello, A. Caronia, G. Pilato, R. Pirrone, S. Gaglio</i>	
A VR-Based Visualization Framework for Effective Information Perception and Cognition	313
<i>H.Y.K. Lau, L.K.Y. Chan, R.H.K. Wong</i>	

Part IV: Robots and Training Systems

From Research on the Virtual Reality Installation	335
<i>F. de Sorbier de Pougnadoresse, P. Bouvier, A. Herubel, V. Biri</i>	
High-Level Hierarchical Semantic Processing Framework for Smart Sensor Networks	347
<i>D. Bruckner, C. Picus, R. Velik, W. Herzner, G. Zucker</i>	
A Human-System Interaction Framework and Algorithm for UbiComp-Based Smart Home	359
<i>C.L. Wu, L.C. Fu</i>	
Biologically Reasoned Point-of-Interest Image Compression for Mobile Robots	371
<i>M. Podpora, J. Sadecki</i>	

Surgical Training System with a Novel Approach to Human-Computer Interaction	383
<i>A. Wytyczak-Partyka, J. Nikodem, R. Klempous, J. Rozenblit</i>	
Kinematics Analysis and Design of 3 DOF Medical Parallel Robots	395
<i>S.D. Stan, M. Manic, V. Maties, R. Balan, D. Verdes</i>	
Graphical Human-Machine Interface for QB Systems	407
<i>M. Jasiński, A. Nawrat</i>	

Visualization of Two Parameters in a Three-Dimensional Environment	419
<i>L. Deligiannidis, A. Sheth</i>	

Part V: Various H-CSI Applications

An Evaluation Tool for End-User Computing Competency in an Organizational Computing Environment	431
<i>C.Y. Yoon, J.N. Jeon, S.K. Hong</i>	
Enterprsise Ontology for Knowledge-Based System	443
<i>J. Andreasik</i>	
Constructing Ensemble-Based Classifiers Based on Feature Transformation: Application in Hand Recognition	459
<i>H. Mirzaei, M. Jafarzadegan</i>	
A New and Improved Skin Detection Method Using Mixed Color Space	471
<i>M.M. Aznaveh, H. Mirzaei, E. Roshan, M.H. Sarae</i>	
A Formal Model for Supporting the Adaptive Access to Virtual Museums	481
<i>A. Dattolo, F.L. Luccio</i>	
3D Molecular Interactive Modeling	493
<i>M. Essabah, S. Otmane, M. Mallem</i>	
Shape Recognition of Film Sequence with Application of Sobel Filter and Backpropagation Neural Network.....	505
<i>A. Główacz, W. Główacz</i>	
Dynamic Changes of Population Size in Training of Artificial Neural Networks	517
<i>A. Słowiak, M. Biakło</i>	

New Approach to Diagnostics of DC Machines by Sound Recognition Using Linear Predictive Coding	529
<i>A. Głowacz, W. Głowacz</i>	
Diagnosis Based on Fuzzy IF-THEN Rules and Genetic Algorithms	541
<i>A. Rotstein, H. Rakytynska</i>	
Necessary Optimality Conditions for Fractional Bio-economic Systems: The Problem of Optimal Harvest Rate	557
<i>D.V. Filatova, M. Grzywaczewski</i>	
Author Index	569

A Formal Model for Supporting the Adaptive Access to Virtual Museums

A. Dattolo¹ and F.L. Luccio²

¹Dipartimento di Matematica e Informatica
Università di Udine, Udine, Italy
antonina.dattolo@uniud.it

²Dipartimento di Informatica
Università Ca' Foscari Venezia, Italy
luccio@unive.it

Abstract. Zz-structures are particular data structures capable of representing both hypertext data information and contextual interconnections among various chunks of information. We consider an extension of the standard zz-structure model in terms of computational agents. In particular, we propose a multi-agent adaptive system in which users store their personal information inside a zz-structure and agents collaborate in order to support them in the extraction of personalized navigational views, allowing creation of personalized tours, for example tours within virtual museums. The strength of this new model resides in the level of freedom users have for the dynamical choice, based on some present interest or necessity, of their navigational path inside the virtual museum.

1 Introduction

In the past culture was strictly related to a face-to-face model of interaction. With the diffusion of the Web this approach has deeply changed: while previously people would physically visit a museum, now the increased use of hypermedia to support access to museum information has modified this approach, thus allowing users to virtually navigate inside virtual museums. Users may have, however, various backgrounds, goals, preferences, hyperspace experiences, knowledge, thus the system has to match to their needs and support them during navigation [1].

Virtual marketing museums have been developed to promote real physical museums. On the other hand, learning museums are accessed by users that want to learn something while exploring the structured hyperspace with context-adapted narration, i.e. users that aim at interacting with a system that recreates a real life museum tour guided by a real human being [2]. However, virtual museums usually provide only very standard and impersonal guided tours by offering, e.g. replicas of the exhibition experience on-line (see, e.g., the open source toolkits created by Omeka [3]).

The creation of the so called *personalized views*, i.e. displaying of a limited and well defined and personalized sub-portion of the entire hyperspace is something that has already been considered in different settings. Traditional web browsers

implement this strategy through bookmarks or personalized site views such as, e.g. in My Yahoo and My Netscape. Some extensions to these examples are adaptive bookmarking systems such as WebTagger [4], SiteSeer [5], and PowerBookmarks [6]. Finally, other solutions using information retrieval techniques to collect information for different users having various needs are Web-based information services [7, 8].

Some work towards the application of different techniques to design adaptable interfaces for museum web sites has been already done, e.g. in [1] where changes on the visitor user profile, and thus on the type of presentation of information, and of navigation are allowed. In [9] the Flamenco system is described, an interface for browsing and searching a large amount of information using similarities to sample images. Recently, the Delphi framework of semantic tools and community annotation for museum collections has been presented [10]. Delphi is an Open Source toolkit, that inherits some ideas of [9] and it is based on linguistic analysis tools, that can be used for browsing and searching in diverse museum collections.

Creating personalized views for the navigation inside virtual museum is thus a very interesting issue. In this paper we discuss a formal structure for the visualization of these views. The proposed visualization technique, supported by an agent-based technology, gives a certain level of freedom to the users, allowing them to interact with the system in order to (partially) choose the path to follow during their navigation.

Our system assumes the storage of the views inside zz-structures [11], particular data structures that store both hypertext data information and the contextual interconnections among different information. These structures are very flexible and have been used in different kind of applications, such as modeling, e.g., an information manager for mobile phones [12], bioinformatics workspaces [12, 13], and many others [14, 15]. Zz-structures have also been applied to the creation of an EAD (Encoded Archival Description) a hierarchical organization of archival collections, typically implemented in XML. This EAD finding aid has been transformed into a zz-structure for visualizing archival information.

Observe that, good navigational tools have to: 1) limit the navigational material by identifying a subset of interesting pages; 2) define adequate structures for the items' storage and create personalized user views; 3) define personalized and adaptive navigational paths for the users.

The paper is organized as follows: in Section 2 we first provide a formal description of the structures and views (in particular n-dimensional views) and we show how to use them to create personalized user views in the context of virtual museum tours. In Section 3 we show how to extend this new concept of views in a dynamically changing setting (point 3), i.e. in a setting where users may dynamically interact with the system in order to decide the path to be followed (limited to a restricted neighborhood of their actual position). Finally, we conclude in Section 4 where our on-going research can be directed.

2 Concept Space and Map

In order to define the concept space and map, we need some preliminary definitions of zz-structures and related views.

2.1 Zz-Structures

Zz-structures [11] introduce a new, graph-centric system of conventions for data and computing. A zz-structure can be thought of as a space filled with cells.

Cells are connected together with links of the same color into linear sequences called *dimensions*. A single series of cells connected in the same dimension is called *rank*, i.e., a rank is in a particular dimension. Moreover, a dimension may contain many different ranks. The starting and an ending cell of a rank are called, *headcell* and *tailcell*, respectively, and the direction from the starting (ending) to the ending (starting) cell is called *posward* (respectively, *negward*). For any dimension, a cell can only have one connection in the posward direction, and one in the negward direction. This ensures that all paths are non-branching, and thus embodies the simplest possible mechanism for traversing links.

Formally a zz-structure is defined as follows (see, [15]). Consider an *edge-colored multigraph* $ECMG = (MG, C, c)$ where: $MG = (V, E, f)$ is a multigraph composed of a set of *vertices* V , a set of *edges* E and a surjective function $f : E \rightarrow \{\{u, v\} \mid u, v \in V, u \neq v\}$. C is a set of colors, and $c : E \rightarrow C$ is an assignment of colors to edges of the multigraph. Finally, $\deg(x)$ (respectively, $\deg_k(x)$) denotes the number of edges incident to x , (respectively, of color c_k).

Definition 1. A zz-structure is an edge-colored multigraph $S = (MG, C, c)$, where $MG = (V, E, f)$, and $\forall x \in V, \forall k = 1, \dots, |C|, \deg_k(x) = 0, 1, 2$. Each vertex of a zz-structure is called zz-cell and each edge a zz-link. The set of isolated vertices is $V_0 = \{x \in V : \deg(x) = 0\}$.

An example of a zz-structure related to an art museum is given in Fig. 1. Vertices are paintings, in particular portraits. Normal (red), dashed (green) and thick (blue) lines group, respectively, operas of the same artist: in particular, $\{v_1, \dots, v_{11}\}$ and $\{v_{12}, \dots, v_{18}\}$ identify, respectively, Van Gogh's and Gauguin's portraits; dashed lines group self-portraits of the two artists ($\{v_1, \dots, v_7\}$ of Van Gogh and $\{v_9, \dots, v_{15}\}$ of Gauguin); finally thick lines group works of arts in the same museum: v_{12}, v_1, v_3 and v_6 are in the Van Gogh Museum in Amsterdam, while $v_2, v_4, v_8, v_9, v_{10}, v_{11}, v_{15}, v_{17}$ and v_{18} are in Musée d'Orsay in Paris.

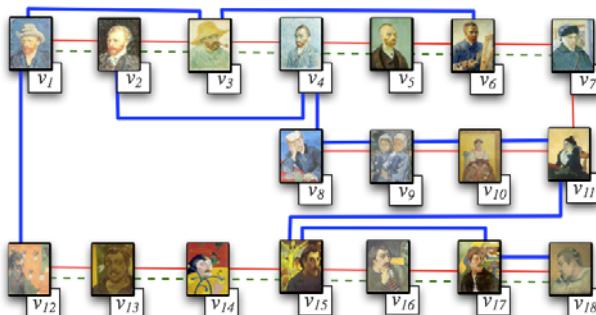


Fig. 1. Van Gogh - Gauguin: self-portraits

Dimensions

An alternative way of viewing a zz-structure is a union of subgraphs, each of which contains edges of a unique color.

Proposition 1. Consider a set of colors $C = \{c_1, c_2, \dots, c_{|C|}\}$ and a family of indirect edge-colored graphs $\{D^1, D^2, \dots, D^{|C|}\}$, where $D^k = (V, E^k, f, \{c_k\}, c)$, with $k = 1, \dots, |C|$, is a graph such that: 1) $E^k \neq \emptyset$; 2) $x \in V$, $\deg_k(x) = 0, 1, 2$. Then $S = \bigcup_{k=1}^{|C|} D^k$ is a zz-structure.

Definition 2. Given a zz-structure $S = \bigcup_{k=1}^{|C|} D^k$, then each graph D^k , $k = 1, \dots, |C|$ is a distinct **dimension** of S .

In Fig. 1, we may identify three dimensions: *artist*, *self-portraits* and *museum*, respectively represented by normal, dashed and thick lines.

Ranks

A rank is in a particular dimension and it must be a *connected component*.

Definition 3. Consider a dimension $D^k = (V, E^k, f, \{c_k\}, c)$, $k = 1, \dots, |C|$ of a zz-structure $S = \bigcup_{k=1}^{|C|} D^k$. Then, each of the l_k connected components of D^k is called a **rank**.

A dimension can contain one (if $l_k = 1$) or more ranks. Moreover, the number l_k of ranks differs in each dimension D^k . In Fig. 1 each of the three dimensions contains two ranks; in particular, the dimension *artist* contains *van-gogh*, and *gauguin*. We note that the example in Fig. 1 is only a fragment of a larger zz-structure; for this reason, for example, in the dimension *museum* we identify only two ranks (related to the *Van Gogh Museum in Amsterdam* and to the *Musée d'Orsay in Paris*). In reality, this dimension contains all the ranks related to the museums in which the paintings are exhibited (such as the *National Gallery of Art in Washington DC*, the *MacNay Art Museum of San Antonio, Texas*, the *Fogg Art Museum in Cambridge*, etc.).

Given a rank R_i^k , an alternative way of viewing a dimension is a union of ranks: $D^k = \bigcup_{i=1}^{l_k} R_i^k \bigcup V_0^k$.

Head and tail cells

If we focus on a vertex x , $R_i^k = \dots x^{-2} x^{-1} x x^{+1} x^{+2} \dots$ is expressed in terms of negward and posward cells of $x : x^{-1}$ is the negward cell of x and x^{+1} the posward cell. We also assume $x^0 = x$. In general $x^{-i} (x^{+i})$ is a cell at distance i in the negward (posward) direction.

Definition 4. Given a rank $R_i^k = (V_i^k, E_i^k, f, \{c_k\}, c)$, a cell x is the **headcell** of R_i^k iff exists its posward cell x^{+1} and it does not exist its negward cell x^{-1} . Analogously, a cell x is the **tailcell** of R_i^k iff exists its negward cell x^{-1} and it does not exist its posward cell x^{+1} .

Views

Personalized views are shown to the users, when they choose a vertex as a focus and a set of preferred topics, e.g., type of operas, artists and so on.

The classical **guided tour** is a suggested linear path, defined in terms of a specific dimension.

An example of guided tour on dimension *museum* is proposed in Fig. 2; in this case, a user is interested to view the portraits, accessing them museum by museum.

The focus is the Musée d'Orsay, and the related rank, composed by 9 cells, is visualized; referring to Fig. 1, the portraits contained in Fig. 2 are $v_2, v_4, v_8, v_9, v_{10}$, and v_{11} collocated in the room 35, v_{15} in the room 43, while v_{17} and v_{18} in the room 44. The user can choose to continue his/her tour by clicking on the forward button, or directly selecting one museum among the ranks present in the current dimension (*Van Gogh Museum of Amsterdam*, *National Gallery of Art of Washington DC*, *MacNay Art Museum of San Antonio, Texas*); in this case, the zoomed cell related to the Musée d'Orsay will substituted by the cell related to new museum, selected by the user.

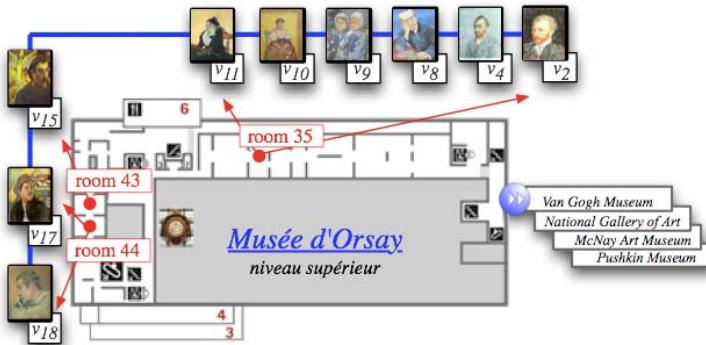


Fig. 2. A guided tour

A guided tour shows one dimension; now we formally present the concept of a 2-dimensional view. $x \in R_{(x)}^a$ denotes that $R_{(x)}^a$ is the rank related to x of color c_a .

Definition 5. Given a zz-structure $S = \bigcup_{k=1}^{|C|} D^k$, where $D^k = \bigcup_{i=1}^{l_k} R_i^k \bigcup V_0^k$, and where $R_i^k = (V_i^k, E_i^k, f, \{c_k\}, c)$, the **H-view** of size $l = 2m + 1$ and of focus $x \in V = \bigcup_{i=0}^k V_i^k$, on main vertical dimension D^a and secondary horizontal

dimension D^b (($a, b \in \{1, \dots, l_k\}$)), is defined as a tree whose embedding in the plane is a partially connected colored $l \times l$ mesh in which:

- the central vertex, in position $((m+1), (m+1))$, is the focus x ,
- the horizontal central path (the $m+1$ -th row) from left to right, focused in vertex $x \in R_{(x)}^b$ is: $x^{-g} \dots x^{-1} x x^{+1} \dots x^{+p}$ where $x^s \in R_{(x)}^b$, for $s = -g, \dots, +p$ ($g, p \leq m$),
- for each cell x^s , $s = -g, \dots, +p$, the related vertical path, from top to bottom, is: $(x^s)^{-g_s} \dots (x^s)^{-1} x^s (x^s)^{+1} \dots (x^s)^{+p_s}$, where $(x^s)^t \in R_{(x^s)}^a$, for $t = -g_s, \dots, +p_s$ ($g_s, p_s \leq m$).

Intuitively, the H -view extracts ranks along the two chosen dimensions. Note that, the name H -view comes from the fact that the columns remind the vertical bars in a capital letter H. As example, consider Fig. 3 that refers to the zz-structure of Fig. 1. The chosen dimensions are *self-portraits* and *museum*. The view has size $l=2m+1=5$, the focus is v_3 , the horizontal central path is $v_3^{-2} v_3^{-1} v_3 v_3^{+1} v_3^{+2} = v_1 v_2 v_3 v_4 v_5$ ($g, p = 2$). The vertical path related to $v_3^{-1} = v_2$ is $(v_3^{-1})(v_3^{-1})^{+1}(v_3^{-1})^{+2} = v_2 v_4 v_8$ ($g_s = 0, p_s = 2$), that is $v_3^{-1} = v_2$ is the head-cell of the rank as $g_s = 0 < m = 2$.

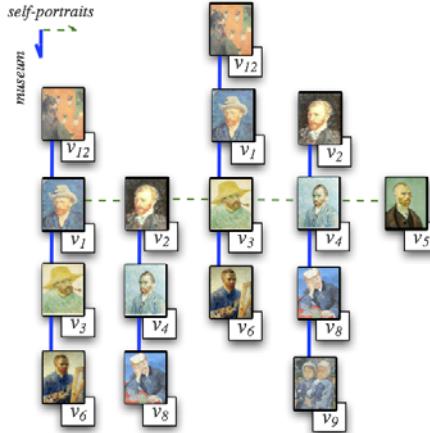


Fig. 3. An H-view related to Fig. 1

We now extend the known definition of H to a number $n > 2$ of dimensions. Intuitively, we will build $n-1$ different H -views, centered in the same focus, with a fixed main dimension and a secondary dimension chosen among the other $n-1$ dimensions. Formally:

Definition 6. Given a zz-structure $S = \bigcup_{k=1}^{|C|} D^k$, where $D^k = \bigcup_{i=1}^{l_k} R_i^k \bigcup V_0^k$, and where $R_i^k = (V_i^k, E_i^k, f, \{c_k\}, c)$, the **n-dimensions H-view** of size $l=2m+1$ and of focus $x \in V = \bigcup_{i=0}^k V_i^k$, on dimensions D^1, D^2, \dots, D^n is composed of $n-1$ rectangular H-views, of main dimension D^1 , $i=1, \dots, n$, all centered in focus x .

2.2 A-Space and a-Map

A concept space provides an ontology for a given knowledge domain.

Definition 7. An **a-space a-CS** is the representation of a concept space in terms of a multi-agent system composed of five types of agents: concept maps, dimensions, ranks, composite and atomic cells.

These five agent classes represent five abstraction levels of the concept space. Concept maps know and directly manipulate dimensions and isolated cells; they include concepts and relationships between concepts that are organized in dimensions. Dimensions, uniquely identified by their colors, know and manipulate their connected components, i.e., their ranks. Ranks know and coordinate the cells and the links that connect them; composite cells contain concept maps related to more specific topics, and finally atomic cells are primary entities and directly refer to documents.

Agents can be used in order to model concurrent computations. They are organized as a universe of inherently autonomous computational entities, which interact with each other by sending messages and reacting to external stimuli by executing some predefined procedural skills. Various authors have proposed different definitions of agents. In our setting an agent is defined as follows:

Definition 8. An **agent** is denoted $A = (Ts, En, Re, Ac)$ where

- Ts represents its **topological structure**;
- $En=\{\eta_1, \eta_2, \dots\}$ defines its local **environment**;
- $Re=\{\rho_1, \rho_2, \dots\}$ is the finite set of incoming **requests**;
- $Ac=\{\alpha_1, \alpha_2, \dots\}$ is the discrete, finite set of possible **actions**.

Ts and En represent the passive part of the agent, while Re and Ac its active part. To give an idea of our agent classes, we define the concept map agent.

Definition 9. An **a-map** is a **concept map** agent $a\text{-map}=(Ts, En, Re, Ac)$ where

- $Ts=S$ (see Definition 2.1 and Proposition 1);
- $En=\{\text{dimensions, isolated-cells, colors, ranks, cells, links, ...}\}$;
- $Re=\{\emptyset\}$, initially;
- $Ac=\{\text{return-colors, return-ranks, return-cells, return-links, check-global-orientation, delete}(cell_1, \dots, cell_n), \dots\}$.

dimensions, isolated-cells and the other data of En contain information on the structure. The first four actions of Ac are internal to the agent and enable it to derive the colors, ranks, cells and links of the zz-structure. These actions are performed by sending querying messages to dimensions and isolated-cells; ranks and

used colors are obtained sending a request to the dimension agents, while cells and links references are requested from the dimensions to the rank agents. Other scripts, such as *check-global-orientation* that checks whether local orientation of neighboring cells are consistent, and *delete(cell₁, ..., cell_n)*, that deletes a chosen set of cells, are used in dynamic operations illustrated in the next section.

3 Displaying and Changing Views

In this section we will show how a session agent may interact with the users in order to first create and display *H*-views, and then neighboring views, i.e. views where the focus is at distance one from the previous one. While displaying these personalized views, the users will also be able to personalize their paths, by deciding to what neighboring view they will move, what dimension they would like to add/remove and so on. During this navigation process, the users can recreate a setting similar to the selected, one by storing the information they find interesting in an album, in order to create a personal, re-usable workspace.

More precisely, assume that A is the user-author, SA the session agent of Z , D^k is the dimension with color c_k , and for simplicity, $R_{(x)}^k$ is the rank cell x belongs to.

Whenever SA receives from A the message $h\text{-view}(x, l, D^a, D^b)$, regarding the displaying of an *H*-view, centered at x , of size l , using main vertical dimension D^a and secondary horizontal dimension D^b , it sends to x the message $focus(h\text{-view}, l, D^a, D^b)$, asking x to assume the role of the focus in the visualization of the *H*-view. The visualization operation may be divided into two different steps.

Step 1. *Wake-up of vertices in the horizontal $m+1$ -th row, i.e., $x^{-g}, \dots, x^{-1}, x^o = x, x^{+1} \dots x^{+p}$. The focus activates rank $R_{(x)}^b$ that propagates the request to the vertices in the $m+1$ -th row. These vertices are woken-up and are visualized horizontally, i.e., as horiz (see Fig. 4).*

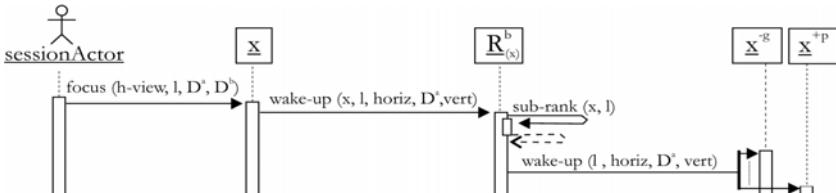


Fig. 4. Computation related to D^b

Step 2. *Propagate the wake-up request from the vertices in the $m+1$ -th row, to their rank of color c_a , and from the rank to its vertices at distance at most m from $x^{-g}, \dots, x^{-1}, x^o = x, x^{+1} \dots x^{+p}$, respectively. These vertices are visualized vertically, i.e., as vert (see Fig. 5).*

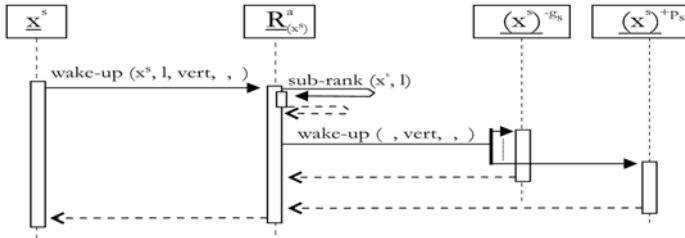


Fig. 5. Computation related to D^a

Another interesting issue is the visualization of a neighboring view, e.g., a view where the focus shifts by one position.

Agents may either apply the *sleep* procedure that turns off all the cells that have been woken up, and then start from scratch a new *wake-up* procedure, or try to optimize the computation and turn off only part of the cells and turn on part of others. E.g., whenever the focus moves vertically, the simplest procedure consists of turning off the whole old view and turning on the new one as it follows:

Posward-Vert-Shift-h-view((x^0), (x^0) $^{+l}$, l , D^a , D^b)

1. send-now(*sleep*((x^0), l , *horiz*, D^a , *vert*)) to $R_{(x^0)}^b$
2. send-now(*focus*(*h-view*, l , D^a , D^b)) to (x^0) $^{+1}$

Note that the focus is shifted from x^0 to $(x^0)^{+1}$: the cells that do not change are the $(l-1)$ placed vertically.

Now, we assume that the focus moves horizontally, i.e., from x to x^{+1} , as, e.g., in Fig. 3 from $x = v_3$ to $x^{+1} = v_4$ thus obtaining the new view of Fig. 6.

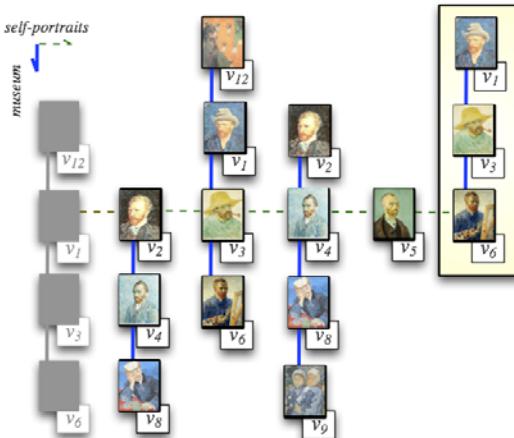


Fig. 6. Horizontal shift of focus

Posward-Horiz-Shift-h-View(x, x^{+1}, l, D^a, D^b)

1. if $g=(l-1)/2 < \text{vertex } x^{((l-1)/2)} \text{ exists}$
2. then send-now($\text{sleep}((l, \text{horiz}, D^a, \text{vert}))$ to $x^g < \text{the } (l-1)/2\text{-th column on the left is turned off}$)
3. if $p=(l-1)/2 < \text{vertex } x^{+(l-1)/2} \text{ exists}$
4. then send-now($\text{wake-up}((l, \text{horiz}, D^a, \text{vert}))$ to $x^{+(p+1)} < \text{the } ((l-1)/2)+1\text{-th column on the right is turned on}$)
5. update-view

In this case, an optimized procedure, called Posward-Horiz-Shift-h-view(x, x^{+1}, l, D^a, D^b), is activated by SA. The procedure has to turn off the vertical column related to vertex $x^{(l-1)/2}$ (lines 1-2), if it exists, and has to turn on the column related to vertex $x^{+(l-1)/2+1}$, given that vertex $x^{+(l-1)/2}$ exists (lines 3-4). The first operation is analogous to the one of Fig. 5 with vertex x^s substituted by vertex x^{-g} and the script *wake-up* with the script *sleep*, with the same arguments. The second operation (lines 3-4) is similar but it has to be applied to vertex $x^{+(p+1)}$ using the script *wake-up*. Finally, SA has to update its view (line 5).

Displaying n-Dimensions H-Views

In this section we will show how to extend the technique of the previous section and thus how the SA may display n-dimensions H-views.

The technique is very similar. For example, for the n -dimensions H-view the SA contacts the focus x with message *focus*(n -dim-h-view, l, D^1, \dots, D^n). Since an n -dimensions H-view on main dimension D^1 and secondary dimensions D^2, D^3, \dots, D^n is composed of $n-1$ different H-views on main dimension D^1 and secondary dimension D^i , for $i=2, \dots, n$, the visualization operation is divided into two different steps.

Step 1. *Wake-up the vertices in the secondary dimensions of each H-view centered in x , i.e., of dimensions D^2, D^3, \dots, D^n . Focus x multicasts message $\text{wake-up}(x, l, \text{plane}, D^1, \text{vert})$ to ranks $R_{(x)}^i$ ($i=2, \dots, n$). The output of this script is the computation of sub-ranks (x, l), i.e., the sub-ranks of size l centered in x in dimension $D^i(x)$, for $i=2, 3, \dots, n$. Then, each $R_{(x)}^i$, $i=2, 3, \dots, n$ sends message $\text{wake-up}(x, l, \text{plane}, D^1, \text{vert})$, to all its vertices.*

Step 2. *Similar to the one of the 2-dimensions case respectively applied to the vertices in ranks $R_{(x)}^i$, for $i=2, 3, \dots, n$.*

The technique for the n -dimensions I-view is very similar. In the case of the 3-dimensions extended H-view the SA contacts the focus x with message *focus*(3-ext-h-view, l, D^1, D^2, D^3). The focus, as in a 2-dimensions H-view, activates rank $R_{(x)}^3$ in order to compute a 2-dimensions H-view with main dimension D^2 and secondary dimension D^3 . The activated vertices x^g, \dots, x^{+p} of $R_{(x)}^3$, while executing the

standard second step of the H -view wake-up procedure, will also act as focus and activate a new procedure for a new 2-dimensions H -view of size l on main dimension D^1 and secondary dimension D^2 .

4 Conclusion

In this paper we have proposed a multi-agent adaptive system to support tours of virtual museums. We have proposed an extended zz-structure model and we have shown how this new system can be used to display personalized user views and to create personalized and navigational adaptive paths for users. As future work we want to concentrate on the study of good techniques to identify the collection of “interesting” pages for specific users, based on their preferences and needs.

References

1. Paternò, F., Mancini, C.: Effective levels of adaptation to different types of users in interactive museum systems. *J. Am. Society Information Science* 51(1), 5–13 (2000)
2. Bowen, J.P., Filippini-Fantoni, S.: Personalization and the web from a museum perspective. In: Proc. Intern. Conference on Museums and the Web 2004: Archives & Museum Informatics, Washington, DC, pp. 63–78 (2004)
3. <http://omeka.org/> (accessed April 6, 2009)
4. Keller, R.M., Wolfe, S.R., Chen, J.R., Rabinowitz, J.L., Mathe, N.: A bookmarking service for organizing and sharing URLs. *Computer Networks & ISDN Systems archive* 29(8-13), 1103–1114 (1997)
5. Rucker, J., Polanco, M.J.: SiteSeer: personalized navigation for the web. *Communications of the ACM Archive* 40(3), 73–75 (1997)
6. Li, W.S., Vu, Q., Agrawal, D., Hara, Y., Takano, H.: PowerBookmarks: a system for personalizable web information organization, sharing, and management. *Computer Networks* 31(11-16), 1375–1389 (1999)
7. Billsus, D., Pazzani, M.J.: Adaptive web site agents. *Journal Agents & Multiagent Systems* 5(2), 205–218 (2002)
8. Brusilovsky, P., Tasso, C.: User modeling for web information retrieval. Preface to special issue of *User Modeling and User Adapted Interaction* 14(2-3), 147–1571 (2004)
9. Yee, K.P., Swearingen, K., Li, K., Hearst, M.: Faceted metadata for image search and browsing. In: Proc. ACM Conference on Computer-Human Interaction, Florida, pp. 401–408 (2003)
10. Schmitz, P.L., Black, M.T.: The Delphi toolkit: enabling semantic search for museum collections. In: Proc. Intern. Conference on Museums and the Web 2001: Archives & Museum Informatics (2008),
http://www.informalscience.org/research/search/all?order_by=date&page=6 (accessed May 15, 2009)
11. Nelson, T.H.: A cosmology for a different computer universe: data model mechanism, virtual machine and visualization infrastructure. *J. Digital Information* 5(1), no. 298 (2004)

12. Moore, A., Goulding, J., Brailsford, T., Ashman, H.: Practical applitudes: case studies of applications of the ZigZag hypermedia system (2004), <http://portal.acm.org/citation.cfm?id=1012851> (accessed April 6, 2009)
13. Moore, A., Brailsford, T.: Unified hyperstructures for bioinformatics: escaping the application prison. *J. Digital Information* 5(1), no. 254 (2004)
14. Canazza, S., Dattolo, A.: Open, dynamic electronic editions of multidimensional documents. In: Proc. European Conference on Internet and Multimedia Systems and Applications, Chamonix, France, pp. 230–235 (2007)
15. Dattolo, A., Luccio, F.L.: Formalizing a model to represent and visualize concept spaces in e-learning environments. In: Proc. 4th WEBIST Intern. Conference, Funchal, Madeira, Portugal, pp. 339–346 (2008)